
GOLDEN**SEA U**

QUICK START GUIDE UVT72





WARNING! POSSIBLE RISK OF INJURY TO EYES AND SKIN.

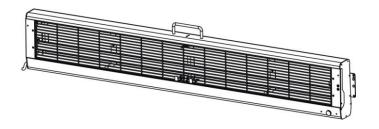

Hazardous optical radiation may be emitted from the light source. Do not look at an operating lamp. It may be harmful to the eyes.
UVC is emitted from the light source. Eye or skin irritation may result from



- exposure. Use appropriate shielding.
- IR may be emitted from the light source. Do not look at operating lamp.





• To avoid eyes and skin exposure to UV light, it is forbidden for animals, plants and all personnel to be present when the UV lamp is on.



• Always disconnect mains supply before removing any fixture covers.



• Keep this device away from rain and moisture.


Thank you for purchasing a GOLDENSEA UV product. This manual is a quick operation guide to get you started. For more information, please always refer to the full version user manual provided.

Before unpacking, please check and be sure that the package is in good condition with no damage on the carton during transportation. In the package, you will find the following:



1. Product Information

Voltage	Power	Net Weight	Size
AC100-240V, 50/60Hz	80W	5 kg	490.8x75.8x240.3mm

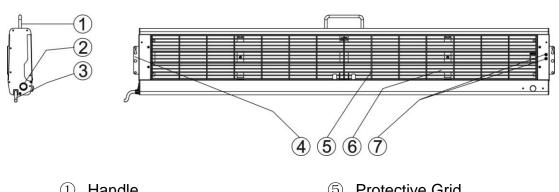

- (1) Handle
- 2 Power Switch (I/O)
- ③ Power Cable
- 4 Hanging Hook

- Protective Grid
- 6 UV Tube
- Indicator Lights

2. Preparation and Notes

- Before using the product, remove the foam (protecting the UV tube) inside the product: pull up the 3 locking Tabs to open the Grid and take the foam out carefully, then re-install the Grid.
- Keep in mind of the following information:

Delayed Start Time	Recommended Disinfection Times/Areas				
2 minutes	30mins/20m ²	60mins/40m ²	120mins/80m ²		

- Place the supplied Warning Sign in a conspicuous place at the entrance/exit of disinfection area.
- Make sure the path to exit the disinfection area is clear before starting the device.
- The operator must wear anti-ultraviolet protective clothing and the UV Glasses before operating.
- The operator must leave the disinfection area and close all entrances after starting the device, make sure the entrances are locked or safeguarded during the entire disinfection process.

- For safety reasons, the device was designed with a motion sensor: if the working device detects any movement within 3m, it will immediately deactive and a continuous audible dual beep and flashing red and green LED indicator lights will engage.
- The motion detector can 'see' through walls, the range can be affected by different materials and thickness (metal: isolated; concrete: decreased; glass or wood: no change; reflector: increased).

3. Installations

Wall Mounting

 Mount 2 screws (M4) on the wall with a distance of 1261.7mm to hang the device.

1261.7mm

Rigging

- Fix your hanging rods into the two rigging holes of the device.
 (rigging holes diameter: 6mm)
- * For safety reasons, always attach a safety cable between the handle of device and another fixing point on the wall or ceiling.



4. Operation

- Switch on the device, the green power indicator light turns on.
- On the supplied remote control:

Press the <30 mins>, <60 mins> or <120 mins> button to select your desired disinfection time.

Press the Start button, audible alarm starts beeping and red power indicator will flash regularly for 2 minutes. You must exit within this 2 minutes.

- The UV tubes will light up once the beeping countdown ends, the power indicator turns red and stays on during the entire disinfection process.
- Once the disinfection process ends, the power indicator switches to green.
 Also an audible alarm sounds.
- Open the doors and windows to ventilate the disinfected area.

